
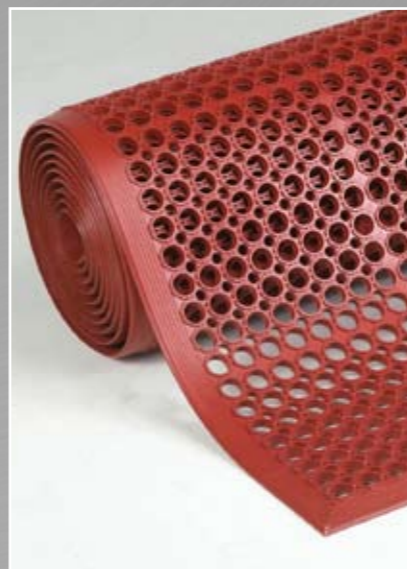


562 Sanitop™ Red and Blue

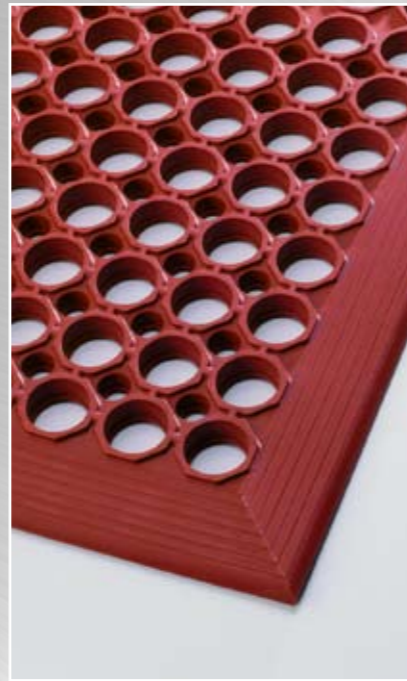

- This mat is grease resistant and its lightweight facilitates handling when cleaning.
- Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, keeping the surface clear.
- Resilient rubber to provide fatigue relief, made of tough compound designed to yield a long service life.
- Designed to withstand harsh chemicals, this mat offers simple solutions to almost any industrial or foodservice application.
- Aggressive slip resistant surfaces.
- Free of silicone therefore safe for vehicle painting facilities.
- Ergonomic benefit of 12.7 mm thickness worker platform.
- Moulded bevelled edges on all 4 sides for trip resistant & easy cart access.

562 Sanitop™ Red and Blue

PRODUCT SPECIFICATIONS			
Designation	Industrial Matting		
Type	Anti-fatigue / anti-slip		
Description	Duckboard, open ring mat with bevel edges		
Material	75% nitrile rubber compound, grease resistant		
Process	Compression moulding		
Category	Better		
Recommended use	Heavy duty – wet/dry industrial environments Food service, dairy and fish industry, abattoirs		
Colours	Red, Blue		
Weight	8 kg/m ²		
Thickness	12.7 mm		
Standard sizes	91 cm x 152 cm, 91 cm x 297 cm, 91 cm x 594 cm		
Custom sizes	N/A		
Special remarks			
PRODUCT TESTING			
Tests	Norms	Results	
Foam battery	ASTM D3574		
Abrasion resistance	ASTM D3884-01		
	500 Cycles		
	1000 Cycles	1.2% weight loss	
Static coefficient of friction	ASTM C1028-96	0.82	
Elongation	ASTM D412		
Breaking load	ASTM D412		
Graves tear strength	ASTM D 1004		
Hardness	ASTM D2240-02		
Anti-slip	DIN 51130 and BG-RULE BGR181		
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09	
MATERIAL ANALYSIS			
Compression Set @25%	ASTM D395	1.4 %	
Compression deflection @ 25 %	ASTM D575	64.2 lb/in ²	
Compression deflection@ 50 %	ASTM D575	212 lb/in ²	
Standard method for rubber deterioration	ASTM D1171	No cracking	
FIRE TESTING			
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102 EN 13501-1	
	Flammability test	ASTM D2859	Pass
ESD	ANSI ESD S7.1 50% Humidity		
Sustainability	<ul style="list-style-type: none"> • Recyclable material • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) 		