



750 Rib'n'Roll™ 3 mm fine rib

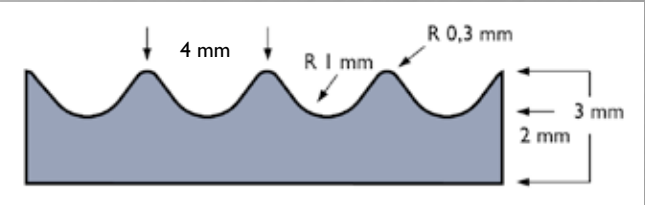

- Fine rubber rib profile runner of 3 mm thickness.
- Matting with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstand diluted acids and alkalis.

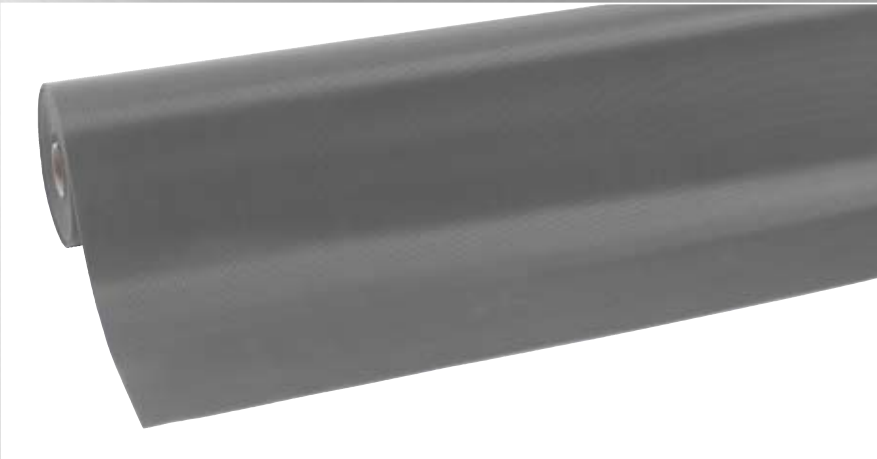

750 Rib'n'Roll™ 3 mm fine rib

PRODUCT SPECIFICATIONS			
Designation	Grooved Matting		
Type	Flooring / runner		
Description	Corrugated fine rib pattern surface		
Material	Synthetic rubber		
Process	Calendering		
Category	Grooved pattern		
Recommended use	Factory and warehouse premises or any kind of industrial applications to protect floors and materials.		
Colours	Black, Grey		
Weight	3.3 kg/m²		
Thickness	3 mm		
Standard sizes	Black: 100 cm x 10 m, 120 cm x 10 m Grey: 100 cm x 10 m		
Custom sizes	Per linear meter		
Special remarks	Black : resistance to temperature : -30°C, +70°C Grey : resistance to temperature : -20°C, +70°C		
PRODUCT TESTING			
Tests		Norms	Results
Compression deflection		U.S.	
	1.4 kg/cm²		
	2.8 kg/cm²		
Foam battery		ASTM D3574	
Abrasion resistance		ASTM D3884-01	
	500 Cycles		
	5000 Cycles		0.2% weight loss
Static coefficient of friction		ASTM C1028-96	0.73
Elongation		DIN53504	250%
Breaking load		ASTM D412	
Tensile strength		DIN 53504	3.5 MPA
Hardness		DIN 53505	60 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR181	
FIRE TESTING			
	Critical radiant flux	ASTM E-648	
	Fire retardancy	DIN4102	
		EN 13501-1	
	Flammability test	ASTM D2859	
	Classification of the reaction to fire		
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		<ul style="list-style-type: none"><li>• Recyclable material</li><li>• Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)</li></ul>	